



## HANGER ASSEMBLY

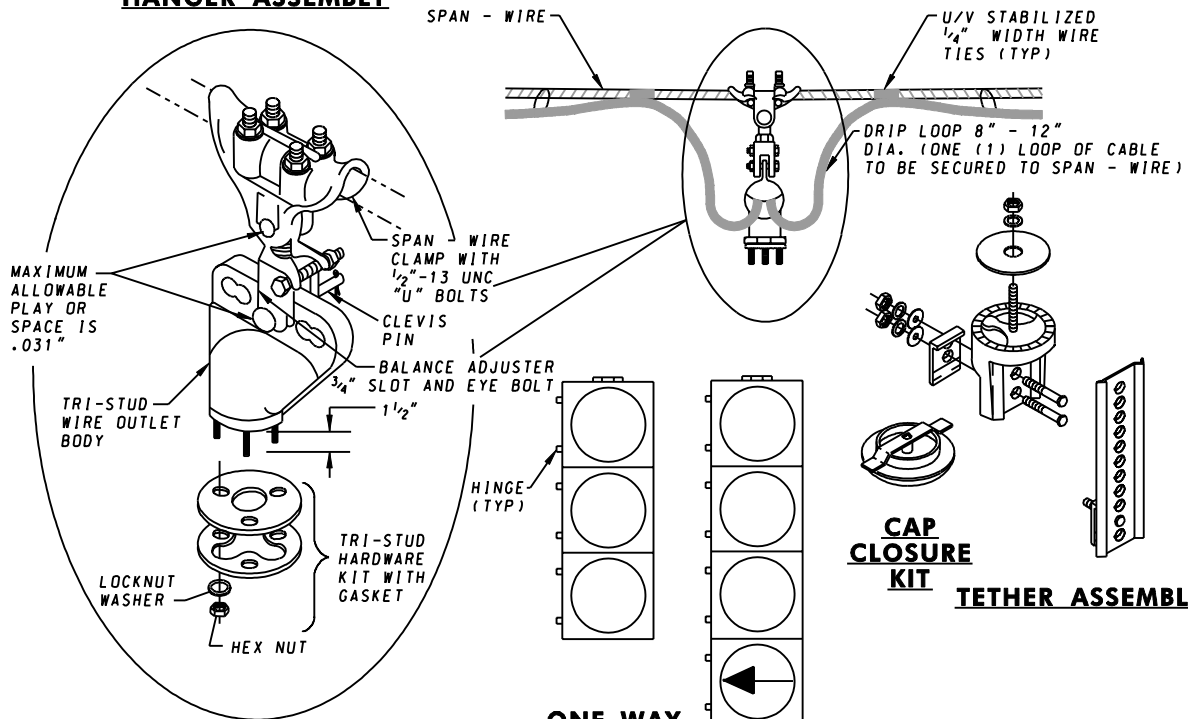

## ONE-WAY THREE OR FOUR - SECTION 8" OR 12" SIGNAL HEADS

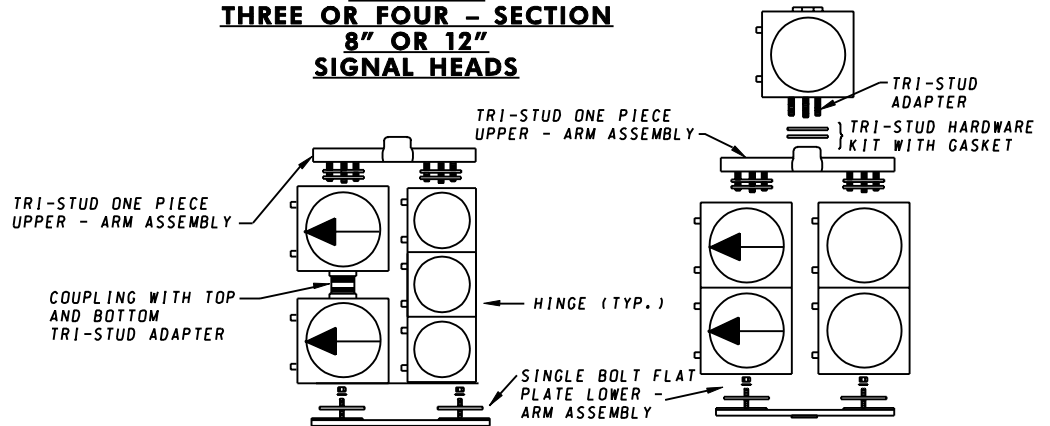

## ONE-WAY, FIVE-SECTION COMBINATION 8" / 12"

## ONE-WAY, FIVE-SECTION 12" SIGNAL HEADS

### NOTES:

1. ALL CAST MOUNTING HARDWARE SHALL BE ALDINE FINISHED ALUMINUM.
2. ALL BOLTS SHALL BE STAINLESS STEEL.
3. ORIENT BALANCE ADJUSTER TO ALLOW WIRE OUTLET IN SAME DIRECTION AS SIGNAL FACES.

### MATERIALS

TYPE OF INDICATION	RIGID MOUNTED	SPAN WIRE MOUNTED
FIVE SECTION 8"/12" COMBINATION	POLYCARBONATE	POLYCARBONATE
PEDESTRIAN SIGNAL INDICATION	ALUMINIUM	N/A
FIVE SECTION 12" SIGNAL HEAD	POLYCARBONATE	TOP SIGNAL INDICATION SHALL BE ALUMINUM BOTTOM 4 SECTION SHALL BE POLYCARBONATE
OPTICALLY PROGRAMMED SIGNAL HEAD INDICATION	N/A	N/A

SPECIFICATION  
**814**

CATEGORY CODE ITEMS

APPROVED

DIRECTOR - OFFICE OF TRAFFIC AND SAFETY



APPROVAL • SHA  
REVISIONS  
APPROVAL 7-1-94  
REVISED 10-1-01  
REVISED  
REVISED

APPROVAL • FEDERAL  
HIGHWAY ADMINISTRATION  
APPROVAL 7-1-94  
REVISED 2-1-01  
REVISED  
REVISED

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

## SIGNAL HEAD MOUNTING DETAILS

STANDARD NO.

MD 814.02